




## Features

- 50 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu s$ )
- Replacement for MLV (0603)
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 5 V
- Low Leakage Current
- Response Time is Typically  $< 1$  ns

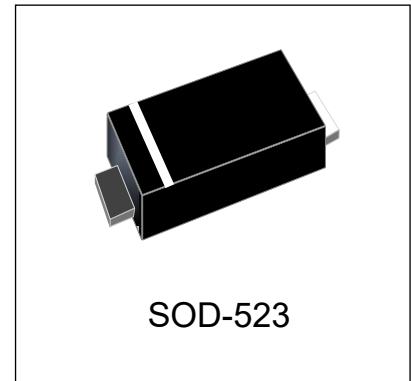

## IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 15$  kV (air),  $\pm 8$  kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)


## Mechanical Characteristics

- JEDEC SOD-523 package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant

## Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 players

## Schematic & PIN Configuration

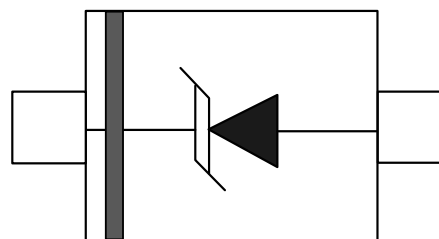


SOD-523 (Top View)

## Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	50	W
Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{pp}$	2	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	+/- 15 +/- 8	kV
Operating Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

## Electrical Parameters (T=25°C)

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

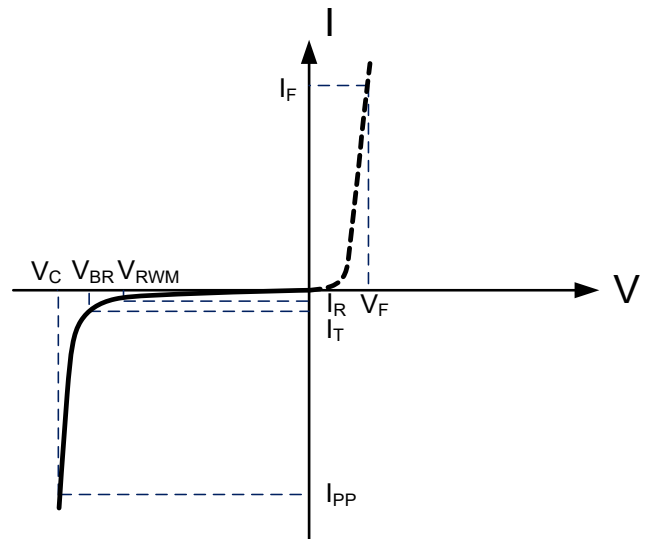

## Electrical Characteristics

DW05D5MC-E						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$				5.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	6.0			V
Forward Voltage	$V_F$	$I_T=10mA$			1.5	V
Reverse Leakage Current	$I_R$	$V_{RWM}=5V, T=25^\circ C$			1	$\mu A$
Peak Pulse Current	$I_{PP}$	$t_p = 8/20\mu s$			2	A
Clamping Voltage	$V_C$	$I_{PP}=2A, t_p = 8/20\mu s$		13.5	16	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$		1	2	pF

## Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

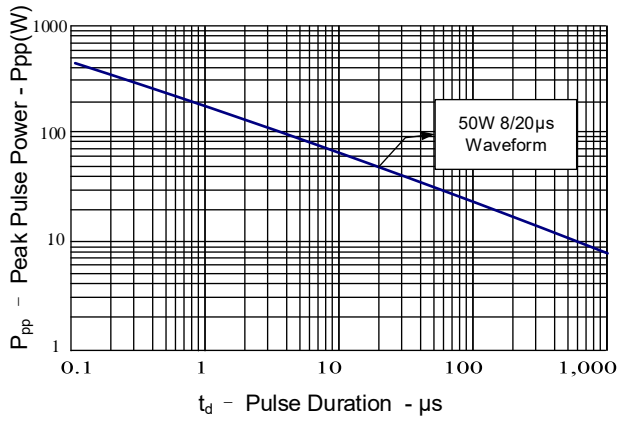


Figure 2: Power Derating Curve

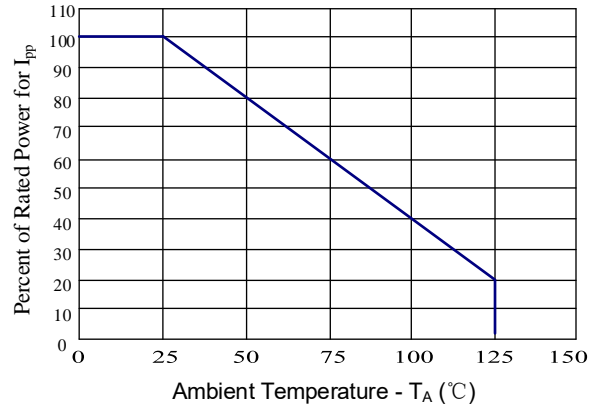


Figure 3: ESD Clamping( 8kV Contact per IEC 61000-4-2)



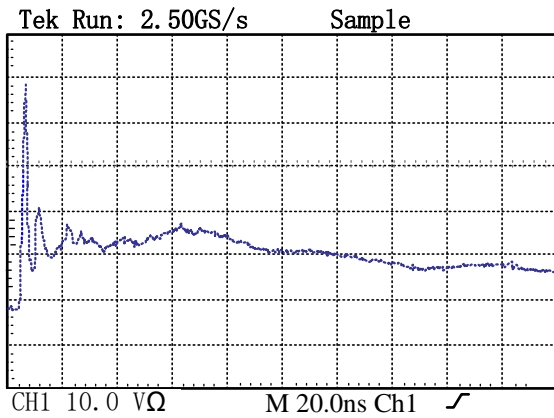


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

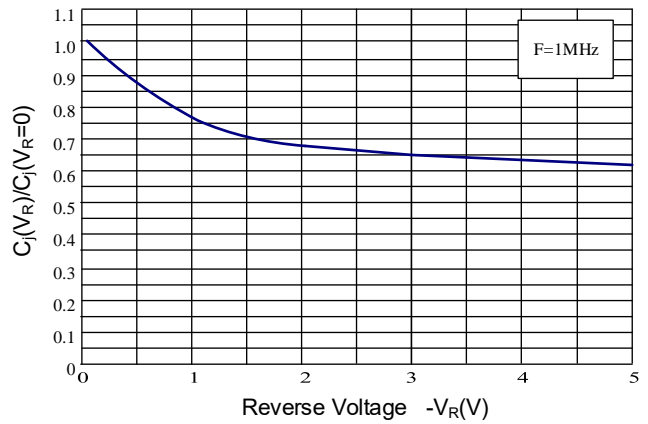

## Outline Drawing – SOD-523

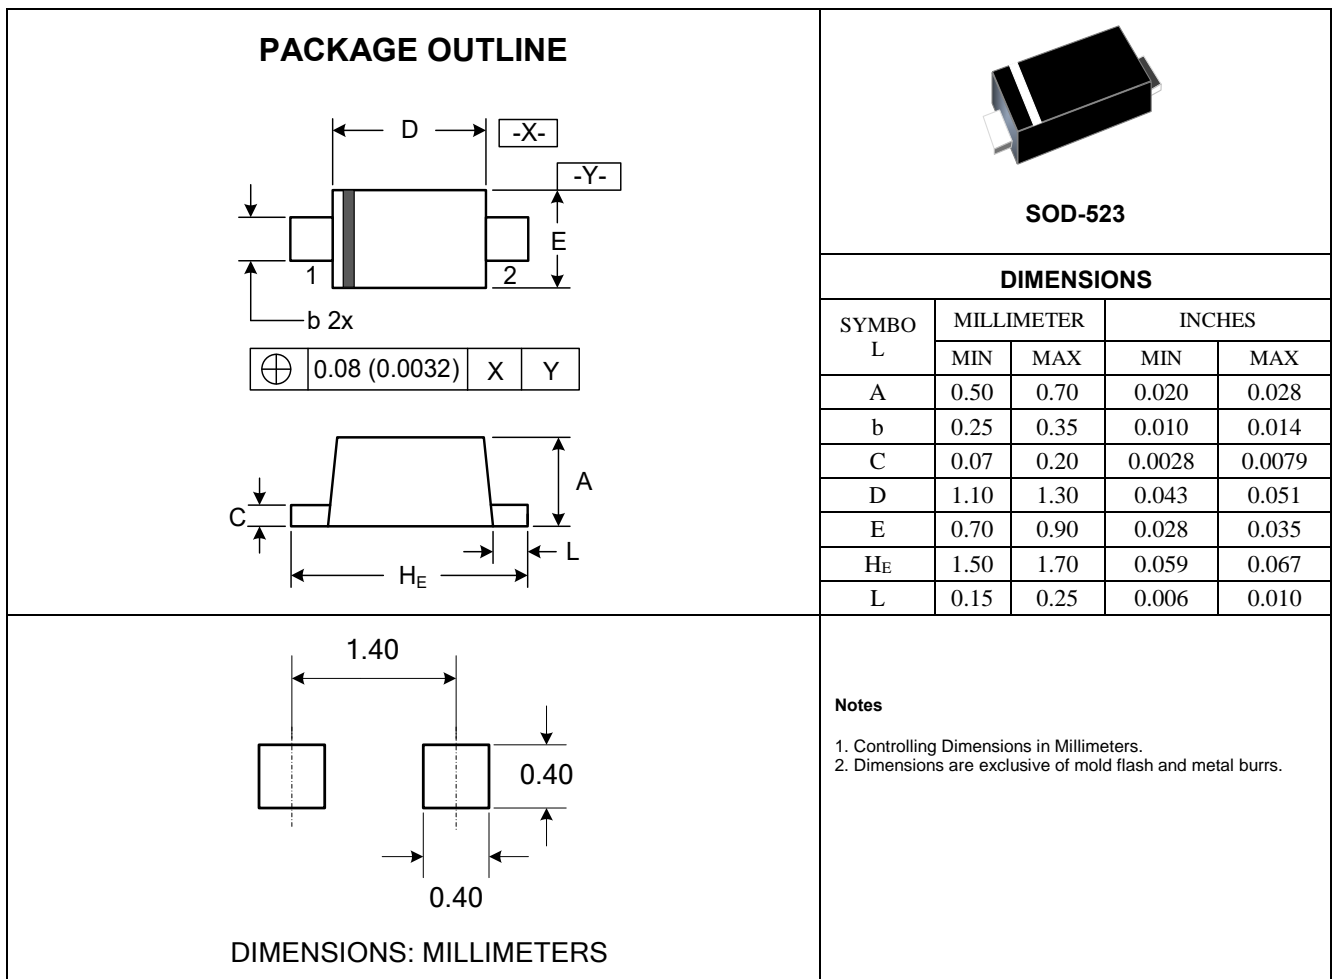

## Marking Codes

Part Number	DW05D5MC-E
Marking Code	M5

## Package Information

Qty: 5k/Reel